4-WHEEL ELECTRIC FORKLIFT 2.0-2.5 TON

General	1	Model			MUFB20	MUFB25
	2	Power Type			Electric	Electric
	3	Rated Capacity		kg	2000	2500
	4	Load Centre		mm	500	500
Characristic&Dimension	5	Lift Height		mm	3000	3000
	6	Fork Size	L×W×T	mm	1070×120×40	1070×120×40
	7	Mast Tilt Angle	F/R	Deg	6°/12°	6°/12°
	8	Front Overhang (Wheel center to fork face)		mm	465	465
	9	Tread	F/R	mm	960/950	960/950
	10	Ground Clearance (Bottom of mast)		mm	110	110
	11	Fork Spread	Min. / Max.	mm	240/1040	240/1040
	12	Overall Dimension	Length to face of fork(Without fork)	mm	2360	2360
	13		Overall Width	mm	1160	1160
	14		Mast Lowered Height	mm	2055	2055
	15		Mast Extended Height(With backrest)	mm	3960	3960
	16		Overhead Guard Height	mm	2240	2240
	17	Turning Radius (outside)		mm	2075	2075
	18	Min. insecting aisle		mm	2250	2250
Performance	19	Speed	Travel (Empty load)	km/h	14	14
	20		Lifting(Full load)	mm/s	300	270
	21	Max.Gradeability		%	15	15
Chassis	22	Tire	Front		7.00-12-12 PR	7.00-12-12 PR
	23		Rear		18×7-8-14 PR	18×7-8-14 PR
	24	Wheelbase		mm	1510	1510
	25	Service weight		kg	4170	4410
Power&Transimission	26	Motor	Drive Motor	kw	11	11
	27		Lift Motor	kw	8.6	8.6
	28	Battery	Voltage/Capacity	V/Ah	48/560	48/630
	29	Controller	Manufacturer		CURTIS	CURTIS
	30		Type		AC	AC
	31	Operating Pressure for Attachment		Mpa	18	18

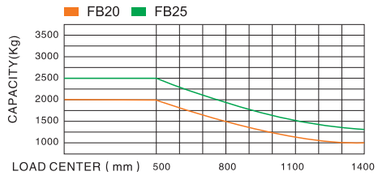

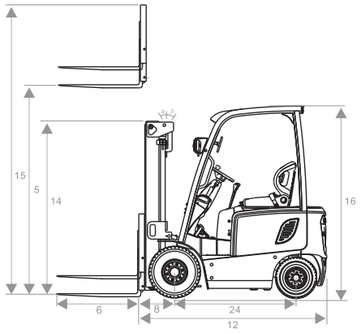

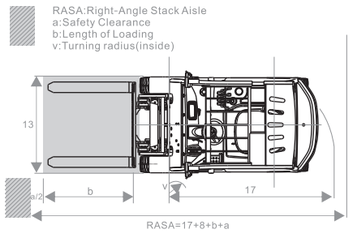

2.0-2.5 TON 4-WHEEL ELECTRIC FORKLIFT MAST

Type	Model	Lift Height (mm)	Load Capacity (kg)		Overall Height (mm)			Free Lift (mm)		Tilt Angle
					2.0-2.5t			2.0-2.5t		
					Mast Lowered	Mast Extended		Mast Extended		F/R
			2.0t	2.5t		With Backrest	Without Backrest	With Backrest	Without Backrest	
Wide view 2-stage mast	M200	2000	2000	2500	1555	2960	2550	-	-	6/12
	M250	2500	2000	2500	1805	3460	3050	-	-	6/12
	M300	3000	2000	2500	2055	3960	3550	-	-	6/12
	M330	3300	2000	2500	2205	4260	3850	-	-	6/12
	M350	3500	2000	2500	2305	4460	4050	-	-	6/12
	M370	3700	2000	2500	2405	4660	4250	-	-	6/12
	M400	4000	2000	2500	2605	4960	4550	-	-	6/12
	M450	4500	1800*1900	2200*2400	2855	5460	5050	-	-	6/6
	M500	5000	1500*1700	1700*2200	3105	5960	5550	-	-	6/6
	M550	5500	1100*1600	1500*1950	3405	6460	6050	-	-	3/6
	M600	6000	700*1500	1000*1800	3655	6960	6550	-	-	3/6
Full free 2-stage mast	Z200	2000	2000	2500	1555	3075	2660	510	930	6/12
	Z250	2500	2000	2500	1805	3575	3160	760	1180	6/12
	Z300	3000	2000	2500	2055	4075	3660	1010	1430	6/12
	Z330	3300	2000	2500	2205	4375	3960	1160	1580	6/12
	Z350	3500	2000	2500	2305	4575	4160	1260	1680	6/12
	Z370	3700	2000	2500	2405	4775	4360	1360	1780	6/12
	Z400	4000	2000	2500	2605	5075	4660	1560	1980	6/12
Full free 3-stage mast	S370	3700	2000	2400	1790	4770	4355	745	1160	6/6
	S400	4000	1900	2400	1890	5070	4655	845	1260	6/6
	S435	4350	1850*1900	2200*2400	2005	5420	5005	960	1375	6/6
	S450	4500	1750*1800	2150*2300	2055	5570	5155	1010	1425	6/6
	S480	4800	1700*1800	1950*2300	2155	5870	5455	1110	1525	6/6
	S500	5000	1500*1700	1650*2200	2225	6070	5655	1180	1595	6/6
	S550	5500	1000*1600	1400*1900	2440	6570	6155	1400	1815	3/6
	S600	6000	650*1300	1000*1600	2605	7070	6655	1570	1985	3/6

4-WHEEL 2.0-2.5Ton ELECTRIC FORKLIFT