

MAXUP

TECHNOLOGY CHANGING THE FUTURE

POWER WITHIN LITHIUM TCF

*The E series 5T
Lithium Battery Forklift Trucks in the Core Era*



Fast charging




*Energy saving and
environmental protection*



Advanced parts



PRODUCT FEATURES

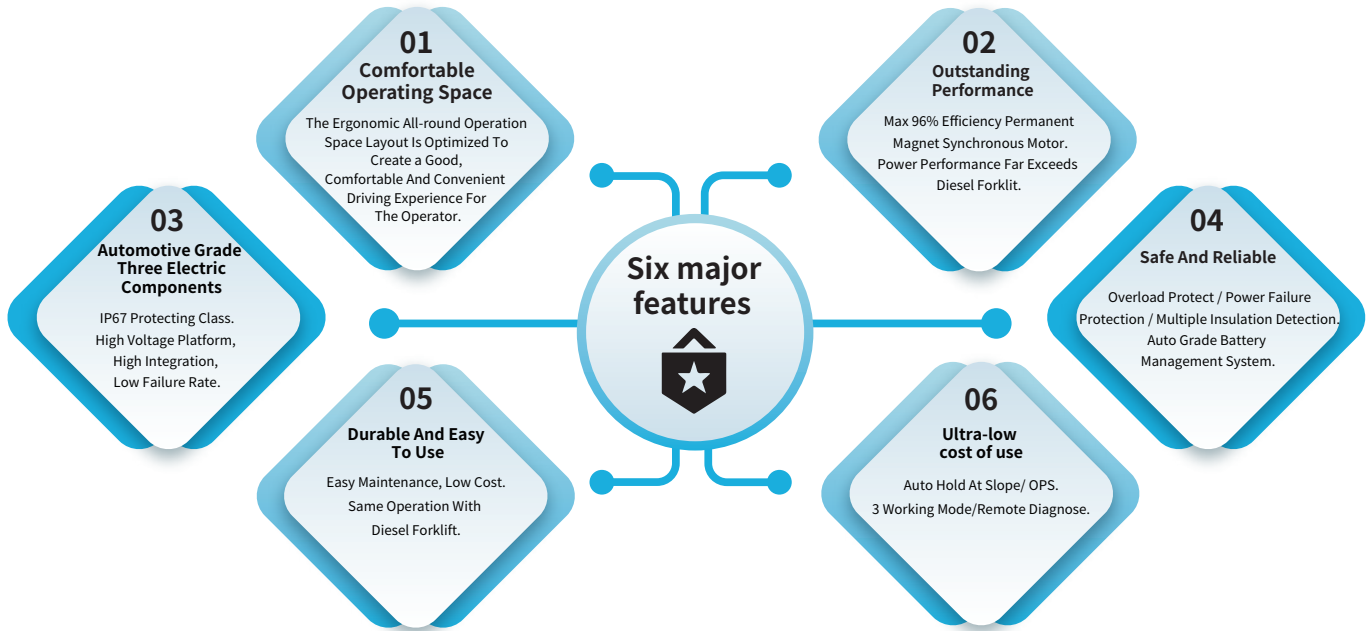

TECHNICAL SPECIFICATION

CHARACIERISTIC

Model	MU45E1M	MU50E1M
1.01 Model	MU45E1M	MU50E1M
1.02 Rated Capacity	4500 kg	5000
1.03 Load Centre	500 mm	500
1.04 Service Weight	6480 kg	6780

DIMENSIONS

Dimensions	MU45E1M	MU50E1M
3.01 Length To Face Of Fork	3280 mm	3280
3.02 Overall Width	1460 mm	1460
3.03 Overhead Guard Height	2340 mm	2340
3.04 Front Overhang	579 mm	579
3.05 Wheelbase	2100 mm	2100
3.06 Turning Radius(Outside)	2910 mm	2910
3.07 Ground Clearance	150 mm	150

PERFORMANCE

Performance	MU45E1M	MU50E1M
4.01 Max.Travel Speed(Full Load/No Load)	18/18 km/h	18/18
4.02 Lifting Speed(Full Load/No Load)	350/450 mm/s	330/450
4.03 Lowering Speed(Full Load/No Load)	≤600/≥300 mm/s	≤600/≥300
4.04 Max.Gradeability(Full Load)	20 %	20

POWER&TRANSMISSIONS

Power&Transmissions	MU45E1M	MU50E1M
5.01 Battery(Type)	Lithium iron phosphate	Lithium iron phosphate
5.02 Battery(Voltage/Capacity)	153.6/230 V/Ah	153.6/230

Add: 71/12 Bangpla, Bangpee, Samutprakarn, Thailand 10540

Tel: 099-465-3664

